

Comparison of Load Flow and Short Circuit Calculations between ETAP 5.5.6 and PowerApps for a Sample System

COMPARISON OF LOAD FLOW AND SHORT CIRCUIT CALCULATIONS BETWEEN ETAP 5.5.6 AND POWERAPPS FOR A SAMPLE SYSTEM..... 1

1. INTRODUCTION..... 3

2. ETAP COMPLETE LOAD FLOW REPORT..... 3

3. COMPARISON OF RESULTS FOR LOAD FLOW CALCULATIONS 16

4. COMPLETE REPORT FOR SHORT CIRCUIT CALCULATIONS FROM ETAP 16

5. COMPARISON OF RESULTS FOR SHORT CIRCUIT CALCULATIONS..... 37

5.1. Single Line to Ground Fault.....37

5.2. Line to Line Fault37

5.3. Double Line to Ground Fault.....38

5.4. Three Phase Fault.....38

1. INTRODUCTION

We have compared the results obtained from the PowerApps with the results obtained from the ETAP 5.5.6 for the two area sample system taken from the text book "Power System Stability and Control" by Prabha Kundur in chapter 12 (McGraw-Hill; Mar 1 1994), page number 813. In this document results comparison for different types of power system studies are given. The two area system is shown in following figure 1

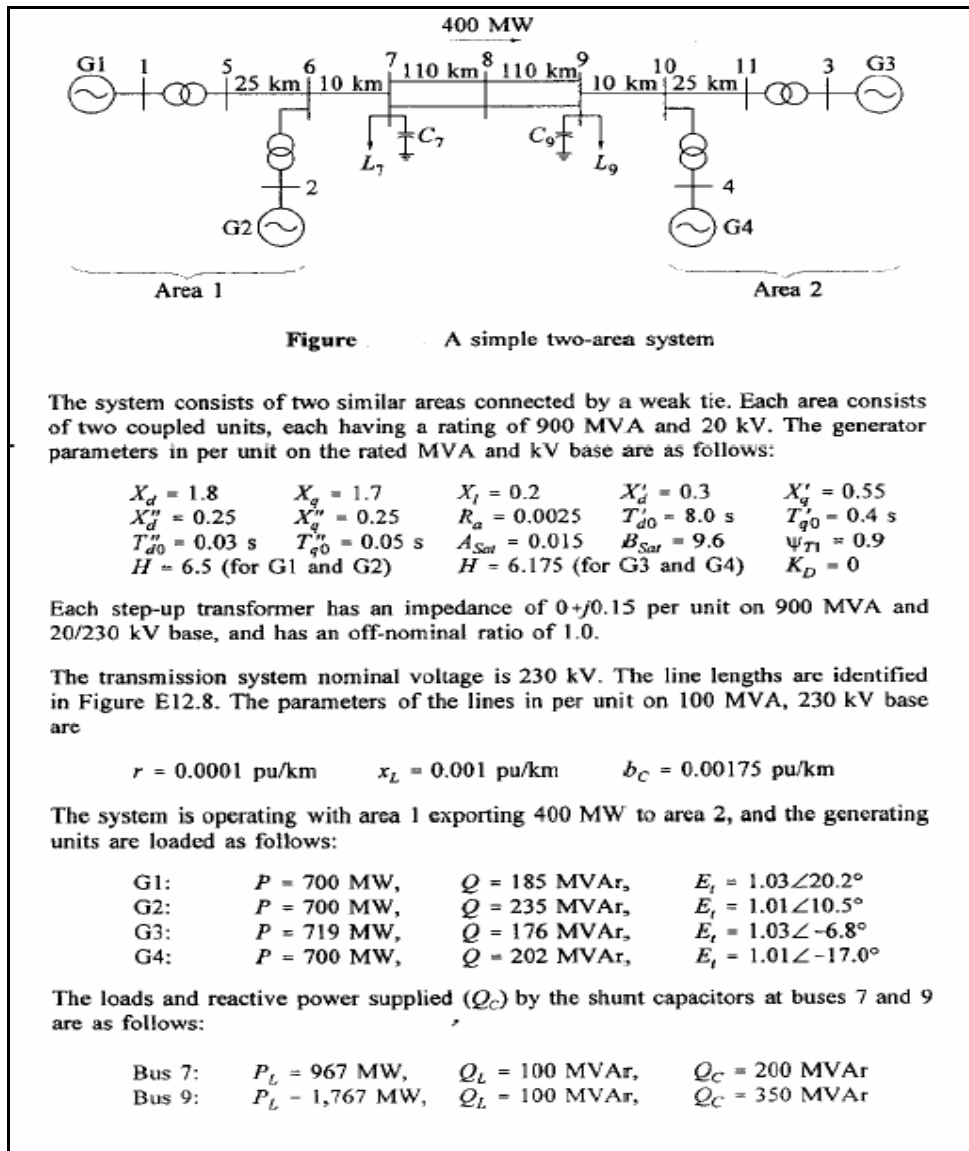


Figure 1

2. ETAP Complete Load Flow Report

The complete load flow report from ETAP is reproduced in this section. The report consists of system data and load flow result output from ETAP. In the next section the corresponding load flow results between PowerApps and ETAP are compared.

Project:
Location:
Contract:
Engineer:
Filename: twoareasystem

ETAP

5.5.6C

Study Case: Load Flow

Page: 1
Date: 04-17-2008
SN: IDEA-LTD
Revision: Base
Config.: Normal

Electrical Transient Analyzer Program

Load Flow Analysis

Loading Category (1): Design

Generation Category (1): Design

Load Diversity Factor: None

	<u>Swing</u>	<u>V-</u>	<u>Load</u>	<u>Total</u>
Number of Buses:	1	3	7	11

	<u>XFMR</u>	<u>XFMR</u>	<u>Reacto</u>	<u>Line/C</u>	<u>Imped</u>	<u>Tie PD</u>	<u>Total</u>
Number of	4	0	0	8	0	0	12

Method of Solution: Newton-Raphson Method

Maximum No. of Iteration: 99

Precision of Solution: 0.0001000

System Frequency: 50 Hz

Unit System: English

Project Filename: twoareasystem

Output Filename: C:\ETAP 556\twoareasystem\twoareasystem.lfr

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP

5.5.6C

Study Case: Load Flow

Page: 2
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: Normal

Adjustments

<u>Tolerance</u>	<u>Apply Adjustm</u>	<u>Individu /Global</u>	<u>Perce</u>
Transformer Impedance:	Yes	Individual	
Reactor Impedance:	Yes	Individual	
Overload Heater Resistance:	No		
Transmission Line Length:	No		
Cable Length:	No		
<u>Temperature Correction</u>	<u>Apply Adjustm</u>	<u>Individu /Global</u>	<u>Degr</u>
Transmission Line Resistance:	Yes	Individual	
Cable Resistance:	Yes	Individual	

Project:	ETAP	Page:	3
Location:	5.5.6C	Date:	04-17-2008
Contract:		SN:	IDEA-LTD
Engineer:		Revision:	Base
Filename: twoareasystem	Study Case: Load Flow	Config.:	Normal

Bus Input Data

Bus			Initial		Load							
ID	kV	Sub	%	Angle	Constant kVA		Constant Z		Constant I		Generic	
		sys	Mag		MW	Mvar	MW	Mvar	MW	Mvar	MW	Mvar
Bus1	20.000	1	103.	0.0								
Bus2	20.000	1	101.	0.0								
Bus3	20.000	1	103.	-6.8								
Bus4	20.000	1	101.	0.0								
Bus5	230.000	1	100.	0.0								
Bus6	230.000	1	100.	0.0								
Bus7	230.000	1	100.	0.0	967.00	100.00	0.000	-200.0				
Bus8	230.000	1	100.	0.0								
Bus9	230.000	1	100.	0.0	1767.0	99.999	0.000	-350.0				
Bus10	230.000	1	100.	0.0								
Bus11	230.000	1	100.	0.0								
Total Number of Buses: 11					2734.000	199.999	0.000	-550.000	0.000	0.000	0.000	0.000

Generation Bus				Voltage		Generation			Mvar Limits	
ID	kV	Type	Sub	%	Angle	MW	Mvar	% PF	Max	Min
			sys	Mag						
Bus1	20.	Voltage	1	103.	0.0	700.00			553.	-22.2
Bus2	20.	Voltage	1	101.	0.0	700.00			553.	-22.2
Bus3	20.	Swing	1	103.	-6.8					
Bus4	20.	Voltage	1	101.	0.0	700.00			553.	-22.2
						2100.0	0.000			

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP

5.5.6C

Study Case: Load Flow

Page: 4
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: Normal

Line/Cable Input Data

Line/Cable ID	Ohms or Siemens/1000 ft per Conductor (Cable) or per Phase (Line)								
	Library	Size	Length		#/Pha	T /°	R	X	Y
			Adj. (ft)	% T ₀					
Cable1			82021.0	0.0	1	75	0.016124	0.161239	0.000001
Cable2			32808.4	0.0	1	75	0.016124	0.161239	0.000001
Cable3			360892.	0.0	1	75	0.016124	0.161239	0.000001
Cable5			360892.	0.0	1	75	0.016124	0.161239	0.000001
Cable15			360892.	0.0	1	75	0.016124	0.161239	0.000001
Cable17			360892.	0.0	1	75	0.016124	0.161239	0.000001
Cable19			82021.0	0.0	1	75	0.016124	0.161239	0.000001
Cable21			32808.4	0.0	1	75	0.016124	0.161239	0.000001

Line / Cable resistances are listed at the specified temperatures.

Project:	ETAP	Page:	5
Location:	5.5.6C	Date:	04-17-2008
Contract:		SN:	IDEA-LTD
Engineer:		Revision:	Base
Filename: twoareasystem	Study Case: Load Flow	Config.:	Normal

2-Winding Transformer Input Data

Transformer ID	Rating					Z Variation			% Tap		Adjust	Phase Shift	
	MVA	Prim	Sec kV	% Z	X/R	+ 5%	- 5%	% Tol	Prim	Sec	% Z	Type	Angle
T1	900.000	230.000	20.000	15.00	99999.00	0	0	0	0	0	15.000	Std Pos. Seq.	0.0
T2	900.000	230.000	20.000	15.00	99999.00	0	0	0	0	0	15.000	Std Pos. Seq.	0.0
T3	900.000	20.000	230.000	15.00	99999.00	0	0	0	0	0	15.000	Std Pos. Seq.	0.0
T4	900.000	230.000	20.000	15.00	99999.00	0	0	0	0	0	15.000	Std Pos. Seq.	0.0

2-Winding Transformer Load Tap Changer (LTC) Settings

Transformer ID	Connected Buses ("*" LTC Side)		Transformer Load Tap Changer Setting					
	Primary Bus ID	Secondary Bus ID	% Tap	% Tap	% Step	Regulated Bus ID	% V	kV

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C
 Study Case: Load Flow

Page: 6
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: Normal

Branch Connections

CKT/Branch		Connected Bus ID		% Impedance, Pos. Seq., 100 MVA			
ID	Type	From Bus	To Bus	R	X	Z	Y
T1	2W XFMR	Bus5	Bus1	0.00	1.67	1.67	
T2	2W XFMR	Bus6	Bus2	0.00	1.67	1.67	
T3	2W XFMR	Bus3	Bus11	0.00	1.67	1.67	
T4	2W XFMR	Bus10	Bus4	0.00	1.67	1.67	
Cable1	Cable	Bus5	Bus6	0.25	2.50	2.51	4.364250
Cable2	Cable	Bus6	Bus7	0.10	1.00	1.00	1.745700
Cable3	Cable	Bus7	Bus8	1.10	11.00	11.05	19.20270
Cable5	Cable	Bus7	Bus8	1.10	11.00	11.05	19.20270
Cable15	Cable	Bus8	Bus9	1.10	11.00	11.05	19.20270
Cable17	Cable	Bus8	Bus9	1.10	11.00	11.05	19.20270
Cable19	Cable	Bus10	Bus11	0.25	2.50	2.51	4.364250
Cable21	Cable	Bus9	Bus10	0.10	1.00	1.00	1.745700

Project:	ETAP	Page:	7
Location:	5.5.6C	Date:	04-17-2008
Contract:		SN:	IDEA-LTD
Engineer:		Revision:	Base
Filename: twoareasystem	Study Case: Load Flow	Config.:	Normal

LOAD FLOW REPORT

Bus		Voltage		Generation		Load		Load Flow				XF % Ton	
ID	kV	%	A	MW	Mva	MW	Mva	ID	MW	Mva	Amp		%
* Bus1	20.0	103.	20.3	700.0	185.	0	0	Bus5	700.	185.	2029	96.	
* Bus2	20.0	101.	10.5	700.0	234.	0	0	Bus6	700.	234.	2110	94.	
* Bus3	20.0	103.	-6.8	719.1	176.	0	0	Bus11	719.	176.	2074	97.	
* Bus4	20.0	101.	-17.0	700.0	202.	0	0	Bus10	700.	202.	2082	96.	
Bus5	230.	100.	13.8	0	0	0	0	Bus6	699.	102.	1764	98.	
								Bus1	-699.	-102.	1764	98.	
Bus6	230.	97.8	3.7	0	0	0	0	Bus5	-687.	16.6	1765	-100	
								Bus7	138	128.	3576	99.	
								Bus2	-699.	-145.	1834	97.	
Bus7	230.	96.0	-4.7	0	0	967.0	-84.7	Bus6	-136	72.4	3576	-99.	
								Bus8	200.	6.14	523.	100	
								Bus8	200.	6.14	523.	100	
Bus8	230.	94.8	-18.6	0	0	0	0	Bus7	-195.	24.3	521.	-99.	
								Bus7	-195.	24.3	521.	-99.	
								Bus9	195.	-24.3	521.	-99.	
								Bus9	195.	-24.3	521.	-99.	
Bus9	230.	97.1	-32.2	0	0	1767.	-230.	Bus8	-190.	53.6	511.	-96.	
								Bus8	-190.	53.6	511.	-96.	
								Bus10	-138	123.	3595	-99.	
Bus10	230.	98.3	-23.7	0	0	0	0	Bus11	-706.	34.9	1804	-99.	
								Bus9	140	80.4	3595	99.	
								Bus4	-699.	-115.	1810	98.	
Bus11	230.	100.	-13.4	0	0	0	0	Bus10	719.	89.9	1804	99.	
								Bus3	-719.	-89.9	1804	99.	

* Indicates a voltage regulated bus (voltage controlled or swing type machine connected to it)

Indicates a bus with a load mismatch of more than 0.1 MVA

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP

5.5.6C

Study Case: Load Flow

Page: 8
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: Normal

Bus Loading Summary Report

Bus			Directly Connected Load								Total Bus Load			Pe Lo ati
			Constant kVA		Constant Z		Constant I		Generic		MVA	%	Amp	
ID	kV	Rated	MW	Mvar	MW	Mvar	MW	Mvar	MW	Mvar				
Bus1	20.		0	0	0	0	0	0	0	0	724.0	96.	20292.7	
Bus2	20.		0	0	0	0	0	0	0	0	738.2	94.	21101.7	
Bus3	20.		0	0	0	0	0	0	0	0	740.3	97.	20749.3	
Bus4	20.		0	0	0	0	0	0	0	0	728.6	96.	20824.9	
Bus5	230		0	0	0	0	0	0	0	0	707.4	98.	1764.6	
Bus6	230		0	0	0	0	0	0	0	0	1395.	99.	3580.8	
Bus7	230		967.0	100.0	0	-184.7	0	0	0	0	1379.	99.	3604.1	
Bus8	230		0	0	0	0	0	0	0	0	393.7	99.	1042.0	
Bus9	230		1767.	99.99	0	-330.2	0	0	0	0	1797.	98.	4645.5	
Bus10	230		0	0	0	0	0	0	0	0	1410.	99.	3601.3	
Bus11	230		0	0	0	0	0	0	0	0	724.7	99.	1804.3	

* Indicates operating load of a bus exceeds the bus critical limit (100.0% of the Continuous Ampere rating).

Indicates operating load of a bus exceeds the bus marginal limit (95.0% of the Continuous Ampere rating).

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP

5.5.6C

Study Case: Load Flow

Page: 9
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: Normal

Branch Loading Summary Report

CKT / Branch		Cable & Reactor			Transformer				
ID	Type	Ampacity (Amp)	Loading Amp	%	Capability (MVA)	Loading (input)		Loading (output)	
						MVA	%	MVA	%
T1	Transfor				900.000	724.047	80.4	707.49	78.6
T2	Transfor				900.000	738.295	82.0	714.98	79.4
T3	Transfor				900.000	740.339	82.3	724.70	80.5
T4	Transfor				900.000	728.610	81.0	709.45	78.8

* Indicates a branch with operating load exceeding the branch capability.

Project:	ETAP	Page:	10
Location:	5.5.6C	Date:	04-17-2008
Contract:		SN:	IDEA-LTD
Engineer:		Revision:	Base
Filename: twoareasystem	Study Case: Load Flow	Config.:	Normal

Branch Losses Summary Report

CKT / Branch ID	From-To Bus		To-From Bus		Losses		% Bus		Vd % in V/m
	MW	Mvar	MW	Mvar	kW	kvar	From	To	
T1	700.000	185.052	-699.999	-102.693	0.8	82358.4	103.	100.6	2.36
T2	700.000	234.691	-699.999	-145.634	0.9	89056.6	101.	97.8	3.19
T3	719.101	176.054	-719.100	-89.947	0.9	86106.3	103.	100.8	2.18
T4	700.000	202.168	-699.999	-115.433	0.9	86735.3	101.	98.3	2.66
Cable1	699.999	102.693	-687.634	16.659	12365.1	119352.8	100.	97.8	2.83
Cable2	1387.633	128.975	-1367.331	72.411	20302.7	201385.5	97.8	96.1	1.71
Cable3	200.165	6.145	-195.366	24.341	4799.2	30486.2	96.1	94.9	1.24
Cable5	200.165	6.145	-195.366	24.341	4799.2	30486.2	96.1	94.9	1.24
Cable15	195.366	-24.341	-190.670	53.607	4696.4	29265.9	94.9	97.1	2.28
Cable17	195.366	-24.341	-190.670	53.607	4696.4	29265.9	94.9	97.1	2.28
Cable21	-1385.661	123.011	1406.173	80.450	20512.9	203461.1	97.1	98.3	1.21
Cable19	-706.174	34.983	719.100	89.947	12925.9	124930.1	98.3	100.8	2.48
					85101.1	1112890.2			

Project:	ETAP	Page:	11
Location:	5.5.6C	Date:	04-17-2008
Contract:		SN:	IDEA-LTD
Engineer:		Revision:	Base
Filename: twoareasytem	Study Case: Load Flow	Config.:	Normal

Alert Summary Report

% Alert Settings

	<u>Critical</u>	<u>Marginal</u>
<u>Loading</u>		
Bus	100.0	95.0
Cable	100.0	95.0
Reactor	100.0	95.0
Line	100.0	95.0
Transformer	100.0	95.0
Panel	100.0	95.0
Protective	100.0	95.0
Generator	100.0	95.0
<u>Bus</u>		
OverVoltage	105.0	102.0
UnderVoltage	95.0	98.0
<u>Generator</u>		
OverExcited (Q)	100.0	95.0
UnderExcited (Q)	10	

Critical Report

<u>Device ID</u>	<u>Type</u>	<u>Condition</u>	<u>Rating/Limit</u>	<u>Unit</u>	<u>Operation</u>	<u>% Operation</u>	<u>Phase Type</u>
Bus8	Bus	Under Voltage	230.000	kV	218.168	94.9	3-Phase

Marginal Report

<u>Device ID</u>	<u>Type</u>	<u>Condition</u>	<u>Rating/Limit</u>	<u>Unit</u>	<u>Operation</u>	<u>% Operation</u>	<u>Phase Type</u>
Bus1	Bus	Over Voltage	20.000	kV	20.600	103.0	3-Phase
Bus3	Bus	Over Voltage	20.000	kV	20.600	103.0	3-Phase
Bus6	Bus	Under Voltage	230.000	kV	224.967	97.8	3-Phase
Bus7	Bus	Under Voltage	230.000	kV	221.028	96.1	3-Phase
Bus9	Bus	Under Voltage	230.000	kV	223.408	97.1	3-Phase
Gen1	Generator	Overload	720.000	MW	700.000	97.2	3-Phase
Gen2	Generator	Overload	720.000	MW	700.000	97.2	3-Phase
Gen3	Generator	Overload	720.000	MW	719.101	99.9	3-Phase
Gen4	Generator	Overload	720.000	MW	700.000	97.2	3-Phase

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasytem

ETAP
 5.5.6C

Study Case: Load Flow

Page: 12
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: Normal

SUMMARY OF TOTAL GENERATION , LOADING & DEMAND

	<u>MW</u>	<u>Mvar</u>	<u>MVA</u>	<u>% PF</u>	
Source (Swing Buses):	719.101	176.054	740.339	97.1	Laggin
Source (Non-Swing Buses)	2100.000	621.911	2190.154	95.8	Laggin
Total Demand:	2819.101	797.964	2929.860	96.2	Laggin
Total Motor Load:	2734.000	199.999	2741.305	99.7	Lagging
Total Static Load:	0.000	-514.925	514.925	0.00	Lagging
Total Constant I Load:	0.000	0.000	0.000		
Total Generic Load:	0.000	0.000	0.000		
Apparent Losses:	85.101	1112.890			
System Mismatch:	0.000	0.000			

Number of Iterations: 3

3. COMPARISON OF RESULTS FOR LOAD FLOW CALCULATIONS

The following table gives the comparison of bus voltage and angle obtained from PowerApps and ETAP 5.5.6. for the load flow solution of the two area system considered.

BUSNAME	PowerApps RESULT		ETAP RESULT		% DIFFERENCE	
	%VMAG	ANGLE	%VMAG	ANGLE	VOLTAGE	ANGLE
BUS1	103.000	20.3	103.000	20.3	0.000	0.0
BUS2	101.000	10.5	101.000	10.5	0.000	0.0
BUS3	103.000	-6.8	103.000	-6.8	0.000	0.0
BUS4	101.000	-17.0	101.000	-17.0	0.000	0.0
BUS5	100.646	13.8	100.645	13.8	0.001	0.0
BUS6	97.813	3.7	97.812	3.7	0.001	0.0
BUS7	96.102	-4.7	96.099	-4.7	0.003	0.0
BUS8	94.862	-18.6	94.856	-18.6	0.006	0.0
BUS9	97.137	-32.2	97.134	-32.2	0.003	0.0
BUS10	98.347	-23.7	98.345	-23.7	0.002	0.0
BUS11	100.826	-13.4	100.825	-13.4	0.001	0.0

It is seen that the results from PowerApps and ETAP 5.5.6 compares well for the test case considered.

4. COMPLETE REPORT FOR SHORT CIRCUIT CALCULATIONS FROM ETAP

For the system considered for the comparison, short circuit calculations were performed using ETAP and PowerApps. For the purpose of comparison, all types of shut faults were considered at all the buses. This section reproduces the complete short circuit report from ETAP software. The next section provides a comparison of the results from ETAP and PowerApps.

Project:	ETAP	Page: 1
Location:	5.5.6C	Date: 04-17-2008
Contract:		SN: IDEA-LTD
Engineer:	Study Case: ShortCircuit	Revision: Base
Filename: twoareasytem		Config.: No Load SCA

Electrical Transient Analyzer Program

Short-Circuit Analysis

ANSI Standard
3-Phase, LG, LL, & LLG Fault Currents
1/2 Cycle Network

Number of Buses:	<u>Swin</u>	<u>V- Control</u>	<u>Load</u>	<u>Tot al</u>				
	1	3	7	11				
Number of	<u>XFMR</u>	<u>XFMR3</u>	<u>Reactor</u>	<u>Line/Cabl</u>	<u>Impedan</u>	<u>Tie PD</u>	<u>Total</u>	
	4	0	0	8	0	0	12	
Number of	<u>Synchron Generat</u>	<u>Power Grid</u>	<u>Synchrono Motor</u>	<u>Inductio Machin</u>	<u>Lumpe Load</u>	<u>Total</u>		
	4	0	0	0	0	4		

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 2
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Adjustments

<u>Tolerance</u>	<u>Apply Adjustm</u>	<u>Individu /Global</u>	<u>Perce</u>
Transformer Impedance:	Yes	Individual	
Reactor Impedance:	Yes	Individual	
Overload Heater Resistance:	No		
Transmission Line Length:	No		
Cable Length:	No		
<u>Temperature Correction</u>	<u>Apply Adjustm</u>	<u>Individu /Global</u>	<u>Degr</u>
Transmission Line Resistance:	Yes	Global	75
Cable Resistance:	Yes	Global	75

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 3
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Bus Input Data

ID	Bus			Sub Bus	Initial	
	Type	Nom. kV	Base kV		%Mag	Angle
Bus1	G	20.000	20.000	1	103.00	0.0
Bus2	G	20.000	20.000	1	101.00	0.0
Bus3	S	20.000	20.000	1	103.00	-6.8
Bus4	G	20.000	20.000	1	101.00	0.0
Bus5	Lo	230.000	230.000	1	100.00	30.
Bus6	Lo	230.000	230.000	1	100.00	30.
Bus7	Lo	230.000	230.000	1	100.00	30.
Bus8	Lo	230.000	230.000	1	100.00	30.
Bus9	Lo	230.000	230.000	1	100.00	30.
Bus10	Lo	230.000	230.000	1	100.00	30.
Bus11	Lo	230.000	230.000	1	100.00	30.

11 Buses Total

All voltages reported by ETAP are in % of bus Nominal kV.
 Base kV values of buses are calculated and used internally by ETAP.

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 4
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Line/Cable Input Data

Ohms or Siemens per 1000 ft per Conductor (Cable) or per Phase (Line)

Line/Cable ID	Library	Size	Length		#/P has	T temp	R1	X1	Y1	R0	X0	Y0
			Adj. (ft)	% Tol								
Cable1			82021.0	0.0	1	75	0.016123	0.161239	0.00000	0.016123	0.161239	0.0000
Cable2			32808.4	0.0	1	75	0.016123	0.161239	0.00000	0.016123	0.161239	0.0000
Cable3			360892.	0.0	1	75	0.016123	0.161239	0.00000	0.016123	0.161239	0.0000
Cable5			360892.	0.0	1	75	0.016123	0.161239	0.00000	0.016123	0.161239	0.0000
Cable15			360892.	0.0	1	75	0.016123	0.161239	0.00000	0.016123	0.161239	0.0000
Cable17			360892.	0.0	1	75	0.016123	0.161239	0.00000	0.016123	0.161239	0.0000
Cable19			82021.0	0.0	1	75	0.016123	0.161239	0.00000	0.016123	0.161239	0.0000
Cable21			32808.4	0.0	1	75	0.016123	0.161239	0.00000	0.016123	0.161239	0.0000

Line / Cable resistances are listed at the specified temperatures.

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 5
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

2-Winding Transformer Input Data

Transformer ID	Rating		Z Variation			% Tap		Adjust	Phase Shift				
	MVA	Pri	Sec	% Z	X/R	+ %	- %	% Tol	Pri	Sec	% Z	Type	Ang
T1	900.000	230.000	20.000	15.00	99999.00	0	0	0	0	0	15.000	Std Pos. Seq.-30.0	
T2	900.000	230.000	20.000	15.00	99999.00	0	0	0	0	0	15.000	Std Pos. Seq.-30.0	
T3	900.000	20.000	230.000	15.00	99999.00	0	0	0	0	0	15.000	Std Pos. Seq. 30.0	
T4	900.000	230.000	20.000	15.00	99999.00	0	0	0	0	0	15.000	Std Pos. Seq.-30.0	

2-Winding Transformer Grounding Input Data

Transformer ID	Rating			Co Type	Grounding							
	MVA	Pri	Sec		Primary		Secondary					
				Type	kV	Am	Oh	Type	kV	Am	Oh	
T1	900.000	230.000	20.000	D/Y				Solid				
T2	900.000	230.000	20.000	D/Y				Solid				
T3	900.000	20.000	230.000	Y/D	Solid							
T4	900.000	230.000	20.000	D/Y				Solid				

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 6
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Branch Connections

CKT/Branch		Connected Bus ID		% Impedance, Pos. Seq., 100 MVAb			
ID	Type	From Bus	To Bus	R	X	Z	Y
T1	2W XFMR	Bus5	Bus1	0.00	1.67	1.67	
T2	2W XFMR	Bus6	Bus2	0.00	1.67	1.67	
T3	2W XFMR	Bus3	Bus11	0.00	1.67	1.67	
T4	2W XFMR	Bus10	Bus4	0.00	1.67	1.67	
Cable1	Cable	Bus5	Bus6	0.25	2.50	2.51	4.364250
Cable2	Cable	Bus6	Bus7	0.10	1.00	1.00	1.745700
Cable3	Cable	Bus7	Bus8	1.10	11.00	11.05	19.20270
Cable5	Cable	Bus7	Bus8	1.10	11.00	11.05	19.20270
Cable15	Cable	Bus8	Bus9	1.10	11.00	11.05	19.20270
Cable17	Cable	Bus8	Bus9	1.10	11.00	11.05	19.20270
Cable19	Cable	Bus10	Bus11	0.25	2.50	2.51	4.364250
Cable21	Cable	Bus9	Bus10	0.10	1.00	1.00	1.745700

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 7
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Synchronous Generator Input Data

Synchronous Generator		Rating			Positive Seq. Impedance						Grounding		Zero Seq.		
ID	Type	MVA	kV	R _D	X _D ⁺	% _D	Ad	T _D	% _{Xd}	Conn	Type	A _m	X _D ⁰	% _{D0}	% _{X0}
Gen1	Turbo	900.000	20.000	1500	100.	0.250	25.00	0.0	30.00	W	Solid		100.00	0.250	25.00
Gen2	Turbo	900.000	20.000	1500	100.	0.250	25.00	0.0	30.00	W	Solid		100.00	0.250	25.00
Gen3	Turbo	900.000	20.000	1500	100.	0.250	25.00	0.0	30.00	W	Solid		100.00	0.250	25.00
Gen4	Turbo	900.000	20.000	1500	100.	0.250	25.00	0.0	30.00	W	Solid		100.00	0.250	25.00

Total Connected Synchronous Generators (= 4): 3600.000 MVA

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 8
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

SHORT- CIRCUIT REPORT

Fault at bus: **Bus1**

Prefault voltage = 20.000 kV = 100.00 % of nominal bus kV (20.000 kV)
 = 100.00 % of base kV (20.000 kV)

Contribution		3-Phase Fault		Line-To-Ground Fault					Positive & Zero Sequence Impedances Looking into "From Bus"			
From Bus ID	To Bus ID	% V From Bus	kA Symm	% Voltage at From Bus			kA Symm. rms		% Impedance on 100 MVA base			
				Va	Vb	Vc	Ia	I3I0	R1	X1	R0	X0
Bus1	Total	0.00	141.677	0.00	92.18	91.48	169.254	169.254	3.86E-002	2.04E+000	3.91E-003	1.04E+000
Bus5	Bus1	21.81	37.774	60.41	100.00	59.04	65.341	105.787 *	3.32E-001	7.63E+000	1.67E-005	1.67E+000
Gen1	Bus1	100.00	103.918	100.00	100.00	100.00	103.918	63.469	2.78E-002	2.78E+000	2.78E-002	2.78E+000

Indicates fault current contribution is from three-winding transformers

* Indicates a zero sequence fault current contribution (3I0) from a grounded Delta-Y transformer

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 9
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Fault at bus: **Bus2**

Prefault voltage = 20.000 kV = 100.00 % of nominal bus kV (20.000 kV)
 = 100.00 % of base kV (20.000 kV)

Contribution		3-Phase Fault		Line-To-Ground Fault					Positive & Zero Sequence Impedances Looking into "From Bus"			
From Bus ID	To Bus ID	% V From Bus	kA Sym	% Voltage at From Bus			kA Symm. rms		% Impedance on 100 MVA base			
				Va	Vb	Vc	Ia	3I0	R1	X1	R0	X0
Bus2	Total	0.00	148.385	0.00	92.57	91.86	175.575	175.575	3.70E-002	1.95E+000	3.91E-003	1.04E+000
Bus6	Bus2	25.68	44.481	62.21	100.00	60.80	71.662	109.738 *	2.61E-001	6.48E+000	1.67E-005	1.67E+000
Gen2	Bus2	100.00	103.918	100.00	100.00	100.00	103.918	65.839	2.78E-002	2.78E+000	2.78E-002	2.78E+000

Indicates fault current contribution is from three-winding transformers

* Indicates a zero sequence fault current contribution (3I0) from a grounded Delta-Y transformer

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
5.5.6C

Study Case: ShortCircuit

Page: 10
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Fault at bus: **Bus3**

Prefault voltage = 20.000 kV = 100.00 % of nominal bus kV (20.000 kV)
 = 100.00 % of base kV (20.000 kV)

Contribution		3-Phase Fault		Line-To-Ground Fault					Positive & Zero Sequence Impedances Looking into "From Bus"			
From Bus ID	To Bus ID	% V From Bus	kA Sym	% Voltage at From Bus			kA Symm. rms		% Impedance on 100 MVA base			
				Va	Vb	Vc	Ia	3I0	R1	X1	R0	X0
Bus3	Total	0.00	141.677	0.00	92.18	91.48	169.254	169.254	3.86E-002	2.04E+000	3.91E-003	1.04E+000
Bus11	Bus3	21.81	37.774	60.41	100.00	59.04	65.341	105.787 *	3.32E-001	7.63E+000	1.67E-005	1.67E+000
Gen3	Bus3	100.00	103.918	100.00	100.00	100.00	103.918	63.469	2.78E-002	2.78E+000	2.78E-002	2.78E+000

Indicates fault current contribution is from three-winding transformers

* Indicates a zero sequence fault current contribution (3I0) from a grounded Delta-Y transformer

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasytem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 11
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Fault at bus: **Bus4**

Prefault voltage = 20.000 kV = 100.00 % of nominal bus kV (20.000 kV)
 = 100.00 % of base kV (20.000 kV)

Contribution		3-Phase Fault		Line-To-Ground Fault					Positive & Zero Sequence Impedances Looking into "From Bus"			
From Bus ID	To Bus ID	% V From Bus	kA Sym	% Voltage at From Bus			kA Symm. rms		% Impedance on 100 MVA base			
				Va	Vb	Vc	Ia	3I0	R1	X1	R0	X0
Bus4	Total	0.00	148.385	0.00	92.57	91.86	175.575	175.575	3.70E-002	1.95E+000	3.91E-003	1.04E+000
Bus10	Bus4	25.68	44.481	62.21	100.00	60.80	71.662	109.738 *	2.61E-001	6.48E+000	1.67E-005	1.67E+000
Gen4	Bus4	100.00	103.918	100.00	100.00	100.00	103.918	65.839	2.78E-002	2.78E+000	2.78E-002	2.78E+000

Indicates fault current contribution is from three-winding transformers

* Indicates a zero sequence fault current contribution (3I0) from a grounded Delta-Y transformer

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 12
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Fault at bus: **Bus5**

Prefault voltage = 230.000 kV = 100.00 % of nominal bus kV (230.000 kV)
 = 100.00 % of base kV (230.000 kV)

Contribution		3-Phase Fault		Line-To-Ground Fault					Positive & Zero Sequence Impedances Looking into "From Bus"			
From Bus ID	To Bus ID	% V From Bus	kA Sym	% Voltage at From Bus			kA Symm. rms		% Impedance on 100 MVA base			
				Va	Vb	Vc	Ia	3I0	R1	X1	R0	X0
Bus5	Total	0.00	9.844	0.00	173.21	173.21	0.000	0.000	6.96E-002	2.55E+000		
Bus6	Bus5	42.03	4.199	0.00	173.21	173.21	0.000	0.000	3.32E-001	5.97E+000		
Bus1	Bus5	37.50	5.648	100.00	100.00	100.00	0.000	0.000	2.78E-002	4.44E+000		

Indicates fault current contribution is from three-winding transformers

* Indicates a zero sequence fault current contribution (3I0) from a grounded Delta-Y transformer

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 13
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Fault at bus: **Bus6**

Prefault voltage = 230.000 kV = 100.00 % of nominal bus kV (230.000 kV)
 = 100.00 % of base kV (230.000 kV)

Contribution		3-Phase Fault		Line-To-Ground Fault					Positive & Zero Sequence Impedances Looking into "From Bus"			
From Bus ID	To Bus ID	% V From Bus	kA Sym	% Voltage at From Bus			kA Symm. rms		% Impedance on 100 MVA base			
				Va	Vb	Vc	Ia	3I0	R1	X1	R0	X0
Bus6	Total	0.00	10.847	0.00	173.21	173.21	0.000	0.000	6.75E-002	2.31E+000		
Bus5	Bus6	36.15	3.612	0.00	173.21	173.21	0.000	0.000	2.78E-001	6.94E+000		
Bus7	Bus6	6.37	1.592	0.00	173.21	173.21	0.000	0.000	1.35E+000	1.57E+001		
Bus2	Bus6	37.50	5.648	100.00	100.00	100.00	0.000	0.000	2.78E-002	4.44E+000		

Indicates fault current contribution is from three-winding transformers

* Indicates a zero sequence fault current contribution (3I0) from a grounded Delta-Y transformer

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 14
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Fault at bus: **Bus7**

Prefault voltage = 230.000 kV = 100.00 % of nominal bus kV (230.000 kV)
 = 100.00 % of base kV (230.000 kV)

Contribution		3-Phase Fault		Line-To-Ground Fault					Positive & Zero Sequence Impedances Looking into "From Bus"			
From Bus ID	To Bus ID	% V From Bus	kA Sym	% Voltage at From Bus			kA Symm. rms		% Impedance on 100 MVA base			
				Va	Vb	Vc	Ia	3I0	R1	X1	R0	X0
Bus7	Total	0.00	8.458	0.00	173.21	173.21	0.000	0.000	1.48E-001	2.96E+000		
Bus6	Bus7	27.06	6.759	0.00	173.21	173.21	0.000	0.000	1.53E-001	3.71E+000		
Bus8	Bus7	37.44	0.850	0.00	173.21	173.21	0.000	0.000	2.51E+000	2.94E+001		
Bus8	Bus7	37.44	0.850	0.00	173.21	173.21	0.000	0.000	2.51E+000	2.94E+001		

Indicates fault current contribution is from three-winding transformers

* Indicates a zero sequence fault current contribution (3I0) from a grounded Delta-Y transformer

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 15
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Fault at bus: **Bus8**

Prefault voltage = 230.000 kV = 100.00 % of nominal bus kV (230.000 kV)
 = 100.00 % of base kV (230.000 kV)

Contribution		3-Phase Fault		Line-To-Ground Fault					Positive & Zero Sequence Impedances Looking into "From Bus"			
From Bus ID	To Bus ID	% V From Bus	kA Sym	% Voltage at From Bus			kA Symm. rms 3I0		% Impedance on 100 MVA base			
				Va	Vb	Vc	Ia		R1	X1	R0	X0
Bus8	Total	0.00	5.435	0.00	173.21	173.21	0.000	0.000	3.51E-001	4.61E+000		
Bus7	Bus8	59.84	1.359	0.00	173.21	173.21	0.000	0.000	1.41E+000	1.84E+001		
Bus7	Bus8	59.84	1.359	0.00	173.21	173.21	0.000	0.000	1.41E+000	1.84E+001		
Bus9	Bus8	59.84	1.359	0.00	173.21	173.21	0.000	0.000	1.41E+000	1.84E+001		
Bus9	Bus8	59.84	1.359	0.00	173.21	173.21	0.000	0.000	1.41E+000	1.84E+001		

Indicates fault current contribution is from three-winding transformers

* Indicates a zero sequence fault current contribution (3I0) from a grounded Delta-Y transformer

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 16
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Fault at bus: **Bus9**

Prefault voltage = 230.000 kV = 100.00 % of nominal bus kV (230.000 kV)
 = 100.00 % of base kV (230.000 kV)

Contribution		3-Phase Fault		Line-To-Ground Fault					Positive & Zero Sequence Impedances Looking into "From Bus"			
From Bus ID	To Bus ID	% V From Bus	kA Sym	% Voltage at From Bus			kA Symm. rms		% Impedance on 100 MVA base			
				Va	Vb	Vc	Ia	3I0	R1	X1	R0	X0
Bus9	Total	0.00	8.458	0.00	173.21	173.21	0.000	0.000	1.48E-001	2.96E+000		
Bus8	Bus9	37.44	0.850	0.00	173.21	173.21	0.000	0.000	2.51E+000	2.94E+001		
Bus8	Bus9	37.44	0.850	0.00	173.21	173.21	0.000	0.000	2.51E+000	2.94E+001		
Bus10	Bus9	27.06	6.759	0.00	173.21	173.21	0.000	0.000	1.53E-001	3.71E+000		

Indicates fault current contribution is from three-winding transformers

* Indicates a zero sequence fault current contribution (3I0) from a grounded Delta-Y transformer

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 17
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Fault at bus: **Bus10**

Prefault voltage = 230.000 kV = 100.00 % of nominal bus kV (230.000 kV)
 = 100.00 % of base kV (230.000 kV)

Contribution		3-Phase Fault		Line-To-Ground Fault					Positive & Zero Sequence Impedances Looking into "From Bus"			
From Bus ID	To Bus ID	% V From Bus	kA Sym	% Voltage at From Bus			kA Symm. rms		% Impedance on 100 MVA base			
				Va	Vb	Vc	Ia	3I0	R1	X1	R0	X0
Bus10	Total	0.00	10.847	0.00	173.21	173.21	0.000	0.000	6.75E-002	2.31E+000		
Bus11	Bus10	36.15	3.612	0.00	173.21	173.21	0.000	0.000	2.78E-001	6.94E+000		
Bus9	Bus10	6.37	1.592	0.00	173.21	173.21	0.000	0.000	1.35E+000	1.57E+001		
Bus4	Bus10	37.50	5.648	100.00	100.00	100.00	0.000	0.000	2.78E-002	4.44E+000		

Indicates fault current contribution is from three-winding transformers

* Indicates a zero sequence fault current contribution (3I0) from a grounded Delta-Y transformer

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 18
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Fault at bus: **Bus11**

Prefault voltage = 230.000 kV = 100.00 % of nominal bus kV (230.000 kV)
 = 100.00 % of base kV (230.000 kV)

Contribution		3-Phase Fault		Line-To-Ground Fault					Positive & Zero Sequence Impedances Looking into "From Bus"			
From Bus ID	To Bus ID	% V From Bus	kA Sym	% Voltage at From Bus			kA Symm. rms		% Impedance on 100 MVA base			
				Va	Vb	Vc	Ia	3I0	R1	X1	R0	X0
Bus11	Total	0.00	9.844	0.00	173.21	173.21	0.000	0.000	6.96E-002	2.55E+000		
Bus10	Bus11	42.03	4.199	0.00	173.21	173.21	0.000	0.000	3.32E-001	5.97E+000		
Bus3	Bus11	37.50	5.648	100.00	100.00	100.00	0.000	0.000	2.78E-002	4.44E+000		

Indicates fault current contribution is from three-winding transformers

* Indicates a zero sequence fault current contribution (3I0) from a grounded Delta-Y transformer

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 19
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Short-Circuit Summary Report

1/2 Cycle - 3-Phase, LG, LL, & LLG Fault Currents

Prefault Voltage = 100 % of the Bus Nominal Voltage

Bus		3-Phase Fault			Line-to-Ground Fault			Line-to-Line Fault			*Line-to-Line-to-		
ID	kV	Rea	Ima	Mag	Rea	Ima	Mag	Rea	Ima	Mag	Real	Ima	Mag
Bus1	20.	2.682	-141.651	141.677	2.681	-169.2	169.254	122.674	2.323	122.696	121.490	107.395	162.153
Bus2	20.	2.825	-148.358	148.385	2.776	-175.5	175.575	128.482	2.446	128.505	127.285	109.921	168.179
Bus3	20.	2.682	-141.651	141.677	2.681	-169.2	169.254	122.674	2.323	122.696	121.490	107.395	162.153
Bus4	20.	2.825	-148.358	148.385	2.776	-175.5	175.575	128.482	2.446	128.505	127.285	109.921	168.179
Bus5	230	0.269	-9.841	9.844	0.000	0.000	0.000	8.522	0.233	8.526	8.522	0.233	8.526
Bus6	230	0.316	-10.843	10.847	0.000	0.000	0.000	9.390	0.274	9.394	9.390	0.274	9.394
Bus7	230	0.422	-8.447	8.458	0.000	0.000	0.000	7.316	0.365	7.325	7.316	0.365	7.325
Bus8	230	0.413	-5.419	5.435	0.000	0.000	0.000	4.693	0.358	4.707	4.693	0.358	4.707
Bus9	230	0.422	-8.447	8.458	0.000	0.000	0.000	7.316	0.365	7.325	7.316	0.365	7.325
Bus10	230	0.316	-10.843	10.847	0.000	0.000	0.000	9.390	0.274	9.394	9.390	0.274	9.394
Bus11	230	0.269	-9.841	9.844	0.000	0.000	0.000	8.522	0.233	8.526	8.522	0.233	8.526

All fault currents are symmetrical momentary (1/2 Cycle network) values in rms kA

* LLG fault current is the larger of the two faulted line currents

Project:
 Location:
 Contract:
 Engineer:
 Filename: twoareasystem

ETAP
 5.5.6C

Study Case: ShortCircuit

Page: 20
 Date: 04-17-2008
 SN: IDEA-LTD
 Revision: Base
 Config.: No Load SCA

Short-Circuit Summary Report

Bus		Positive Sequence Imp.			Negative Sequence Imp.			Zero Sequence Imp. (ohm)		
ID	kV	Resista	Reacta	Impeda	Resista	Reacta	Impeda	Resista	Reacta	Impeda
Bus1	20.000	0.00154	0.08149	0.08150	0.00154	0.08149	0.08150	0.00016	0.04167	0.04167
Bus2	20.000	0.00148	0.07780	0.07782	0.00148	0.07780	0.07782	0.00016	0.04167	0.04167
Bus3	20.000	0.00154	0.08149	0.08150	0.00154	0.08149	0.08150	0.00016	0.04167	0.04167
Bus4	20.000	0.00148	0.07780	0.07782	0.00148	0.07780	0.07782	0.00016	0.04167	0.04167
Bus5	230.000	0.36838	13.48385	13.48888	0.36838	13.4838	13.4888			
Bus6	230.000	0.35689	12.23656	12.24177	0.35689	12.2365	12.2417			
Bus7	230.000	0.78336	15.68061	15.70016	0.78336	15.6806	15.7001			
Bus8	230.000	1.85843	24.36246	24.43324	1.85843	24.3624	24.4332			
Bus9	230.000	0.78336	15.68061	15.70016	0.78336	15.6806	15.7001			
Bus10	230.000	0.35689	12.23656	12.24177	0.35689	12.2365	12.2417			
Bus11	230.000	0.36838	13.48385	13.48888	0.36838	13.4838	13.4888			

5. COMPARISON OF RESULTS FOR SHORT CIRCUIT CALCULATIONS

The following comparison tables give the fault current for different types of faults obtained from PowerApps and ETAP 5.5.

5.1. Single Line to Ground Fault

FAULTEDBUS	FAULT CURRENT IN KA		
	PowerApps	ETAP	DIFFERENCE
BUS1	169.253	169.254	0.001
BUS2	175.574	175.575	0.001
BUS3	169.253	169.254	0.001
BUS4	175.574	175.575	0.001
BUS5	0.000	0.000	0.000
BUS6	0.000	0.000	0.000
BUS7	0.000	0.000	0.000
BUS8	0.000	0.000	0.000
BUS9	0.000	0.000	0.000
BUS10	0.000	0.000	0.000
BUS11	0.000	0.000	0.000

5.2. Line to Line Fault

FAULTEDBUS	FAULT CURRENT IN KA		
	PowerApps	ETAP	DIFFERENCE
BUS1	122.696	122.696	0.000
BUS2	128.505	128.505	0.000
BUS3	122.696	122.696	0.000
BUS4	128.505	128.505	0.000
BUS5	8.526	8.526	0.000
BUS6	9.394	9.394	0.000
BUS7	7.325	7.325	0.000
BUS8	4.707	4.707	0.000
BUS9	7.325	7.325	0.000
BUS10	9.394	9.394	0.000
BUS11	8.526	8.526	0.000

5.3. Double Line to Ground Fault

FAULTEDBUS	FAULT CURRENT IN KA		
	PowerApps	ETAP	DIFFERENCE
BUS1	162.255	162.153	0.101
BUS2	168.273	168.179	0.094
BUS3	162.255	162.153	0.101
BUS4	168.273	168.179	0.094
BUS5	8.526	8.526	0.000
BUS6	9.394	9.394	0.000
BUS7	7.325	7.325	0.000
BUS8	4.707	4.707	0.000
BUS9	7.325	7.325	0.000
BUS10	9.394	9.394	0.000
BUS11	8.526	8.526	0.000

5.4. Three Phase Fault

FAULTEDBUS	FAULT CURRENT IN KA		
	PowerApps	ETAP	DIFFERENCE
BUS1	141.677	141.677	0.000
BUS2	148.385	148.385	0.000
BUS3	141.677	141.677	0.000
BUS4	148.385	148.385	0.000
BUS5	9.844	9.844	0.000
BUS6	10.847	10.847	0.000
BUS7	8.458	8.458	0.000
BUS8	5.435	5.435	0.000
BUS9	8.458	8.458	0.000
BUS10	10.847	10.847	0.000
BUS11	9.844	9.844	0.000

Note: The small and negligible difference in some fault current is possibly due to PowerApps takes zero transformer winding resistance given as per the book input data. But ETAP 5.5.6 takes some X/R ratio for transformer.

In short circuit studies all shunt elements are not considered. (PowerApps has provision for considering all shunt elements, line charging, transformer taps, initial power flow solution, motor contributions, in the short circuit calculations, ETAP treats constant power loads as Motors for short circuit calculations, whereas, in PowerApps motors needs to be modeled explicitly).